
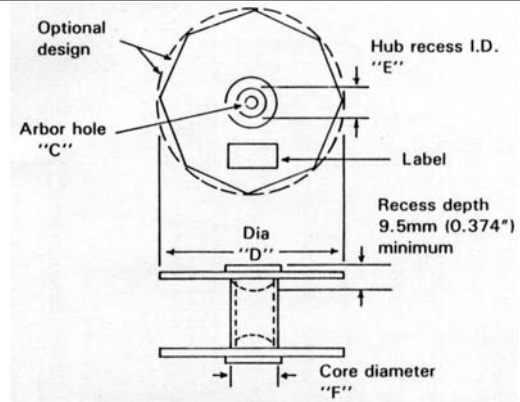


EIA STANDARD RS-296-D

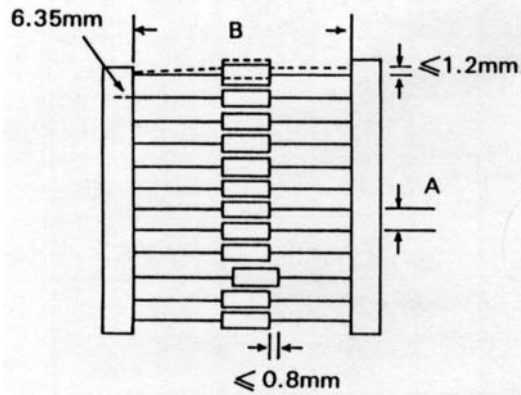

Reel label consists of:

1. Component type
2. Electrical values
3. Manufacturer's name
4. Date
5. Component quantity

CAPACITOR BODY DIAMETER	CAPACITOR PITCH "A" $\pm 0.5\text{mm}$ (0.020")
$\leq 5\text{mm}$ ($\leq 0.197''$)	5mm or 0.200"
5.01 - 10mm (0.197 - 0.394")	10mm or 0.400"
10.01 - 15mm (0.394 - 0.591")	15mm or 0.600"

CAPACITOR BODY LENGTH	INSIDE TAPE SPACING "B" $\pm 1.5\text{mm}$ (0.059")
$\leq 16.50\text{mm}$ ($\leq 0.65''$)	52.44mm or 2.062"
16.51 - 28.45mm (0.651 - 1.12")	63.50mm or 2.500"
28.46 - 37.00mm (1.121 - 1.45")	73.00mm or 2.874"

	C	D	E	F
EIA Std.	13.9-38.1mm (0.54-1.50")	76.2-355.6mm (3.0-14.0")	28.6-78.0mm (1.126-3.071")	34.5-92.0mm (1.374-3.626")

Capacitor Body Dia.	Pitch	Quantity pcs/reel
$\leq 5.0\text{mm}$	5mm	4,000 max
5.1 - 7.0mm	10mm	2,000max
7.1 - 9.5mm	10mm	1,000 max