


PEL is constructed with polyester film dielectric aluminum foil electrode, copper lead and epoxy resin coating in inductive type. They are suitable for blocking, bypass and coupling of DC and signal to VHF range, timing circuits, filtering and other general-purpose usage and are ideal for use in TV, radio, tape recorder, stereo equipments and other general electronic equipments.

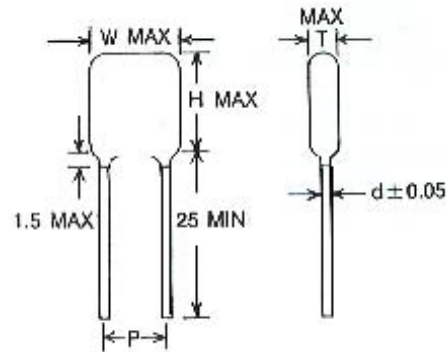

Features:

- High moisture resistance.
- Good solderability
- Available on tape and reel for automatic insertion.
- ESR is minimized
- Very small size, especially in H dimension.

Specification:

1. Operating Temperature: -40°C ~ + 85°C
2. Capacitance Range: 0.001 μF ~ 0.22 μF
3. Capacitance Tolerance: ±5%(J), ±10%(K), ±20%(M).
4. Rated Voltage: 50VDC, 100VDC.
5. Dissipation Factor: 1.0% MAX. at 1KHz, 25°C
6. Insulation Resistance: > 20,000 MΩ (C ≤ 0.1μF)
> 2,000 MΩ · μF (C > 0.1μF)

Unit: mm

RV	50VDC/100VDC				
SIZE	W	H	T	P	dΦ
CAP(μF)					
0.001	6.5	8.0	3.5	3.5 ± 0.5	0.5
0.0015	6.5	8.0	4.0	3.5 ± 0.5	0.5
0.0018	6.5	8.0	4.0	3.5 ± 0.5	0.5
0.0022	6.5	8.0	4.0	3.5 ± 0.5	0.5
0.0027	6.5	8.0	4.0	3.5 ± 0.5	0.5
0.0033	6.5	8.0	4.0	3.5 ± 0.5	0.5
0.0039	6.5	8.0	4.0	3.5 ± 0.5	0.5
0.0047	6.5	9.0	4.0	3.5 ± 0.5	0.5
0.0056	6.5	9.0	4.5	3.5 ± 0.5	0.5
0.0068	7.0	9.0	4.5	3.5 ± 0.5	0.5
0.0082	7.0	9.0	4.5	3.5 ± 0.5	0.5
0.01	7.0	9.0	4.5	3.5 ± 0.5	0.5
0.012	7.0	9.0	4.5	3.5 ± 0.5	0.5
0.015	7.0	9.0	5.0	3.5 ± 0.5	0.5
0.018	7.0	9.0	5.0	3.5 ± 0.5	0.5
0.022	7.5	10.0	4.0	3.5 ± 1.0	0.5
0.027	7.5	10.0	4.0	3.5 ± 1.0	0.5
0.033	7.5	11.0	4.5	3.5 ± 1.0	0.5
0.039	7.5	11.0	4.5	3.5 ± 1.0	0.5
0.047	7.5	11.0	5.0	5.0 ± 1.0	0.5
0.056	8.0	11.0	5.0	5.0 ± 1.0	0.5
0.068	9.5	11.0	5.5	5.0 ± 1.0	0.5
0.082	9.5	11.0	5.5	5.0 ± 1.0	0.5
0.1	9.5	11.0	6.0	5.0 ± 1.0	0.5
0.15	12.0	13.0	7.0	6.0 ± 1.0	0.6
0.22	15.0	14.0	8.0	6.5 ± 1.0	0.6