


**Features:**

- Self-healing property.
- Special for S-shaping correction circuit in TV sets and monitors.
- Low dissipation factor and high-resolution resistance.
- Suitable for high current and High-Frequency.
- Flame retardant epoxy resin coating
- Complication with (UL 94V-0)

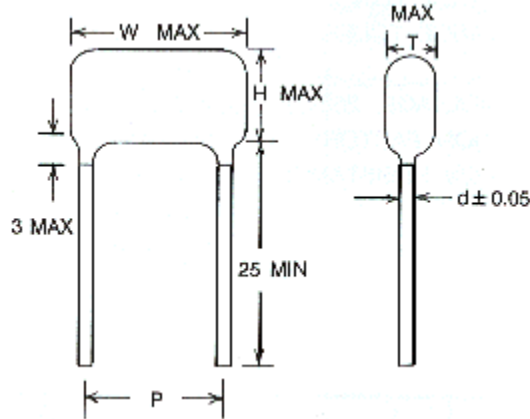

W	13.0	18.5	26.0	32.0
P	10.0	15.0	22.5	27.5
dΦ	0.8	0.8	0.8	0.8

**Specification:**

1. **Operating Temperature:** -40°C ~ + 85°C
2. **Capacitance Range:** 0.10 μF ~ 1.5 μF
3. **Capacitance Tolerance:** ±5%(J), ±10%(K), ±20%(M).
4. **Rated Voltage:** 250VDC, 400VDC
5. **Dissipation Factor:** ≤0.1% (at 1KHz), 0.2% max at 10KHz, 20°C
6. **Insulation Resistance:** 50,000 MΩ (C ≤ 0.33 μF),  
>100,00MΩ · μF (C > 0.33μF)

Unit: mm

RV	250VDC			400VDC		
SIZE	W	T	H	W	T	H
CAP(μF)						
0.10	13.0	8.5	13.0	18.5	8.5	14.0

0.11	18.5	7.0	11.0	18.5	9.0	14.0
0.12	18.5	7.0	11.0	18.5	9.5	15.0
0.13	18.5	7.0	11.5	18.5	9.5	15.0
0.15	18.5	7.0	12.0	18.5	10.0	16.0
0.16	18.5	7.5	12.5	18.5	10.0	16.0
0.18	18.5	7.5	13.0	26.0	9.0	15.0
0.20	18.5	8.0	13.0	26.0	9.5	15.5
0.22	18.5	8.0	13.5	26.0	9.5	16.0
0.24	18.5	8.5	14.0	26.0	10.0	16.5
0.27	18.5	9.0	14.5	26.0	10.5	17.0
0.30	18.5	9.5	16.0	26.0	11.0	17.5
0.33	18.5	9.5	16.5	26.0	11.5	18.0
0.36	18.5	10.0	17.5	26.0	12.0	18.5
0.39	26.0	8.5	15.0	26.0	12.5	19.0
0.43	26.0	9.0	15.5	32.0	11.0	18.5
0.47	26.0	9.5	16.0	32.0	11.5	19.0
0.51	26.0	10.0	16.5	32.0	12.0	19.0
0.56	26.0	10.5	17.0	32.0	13.0	19.5
0.62	26.0	10.5	17.5	32.0	13.5	20.0
0.68	26.0	11.0	18.0	32.0	13.5	20.5
0.75	26.0	11.0	18.5	32.0	14.0	21.5
0.82	26.0	11.5	19.0	32.0	14.5	22.5
0.91	26.0	11.5	19.5	32.0	15.0	23.0
1.0	26.0	12.0	21.0	32.0	15.0	24.0
1.1	32.0	12.0	19.5			
1.2	32.0	12.0	20.5			
1.3	32.0	12.5	22.0			
1.5	32.0	13.0	23.0			